



Quick start
Motorcycle Battery

Quick start
Motorcycle Battery



TRONTEK GROUP

B-228, Naraina Industrial Area, New Delhi -110028.
Phone: 011-48022444 Email: sales@trontek.com
Website: www.trontek.com

www.trontek.com



LT 2.5-3

Physical Specifications

Voltage	Capacity (AH)	Dimensions(±2)			Weight (Approx)	
		Length	Width	Height	With Acid	Electrolyte
12V	2.5AH	80mm (3.15 inches)	70mm (2.76 inches)	105mm (4.13 inches)	1.20Kg (2.64lbs)	0.22Kg (0.48lbs)



LT 4-3

Physical Specifications

Voltage	Capacity (AH)	Dimensions(±2)			Weight (Approx)	
		Length	Width	Height	With Acid	Electrolyte
12V	3.5AH	113mm (4.45 inches)	70mm (2.76 inches)	85mm (3.35 inches)	1.4Kg (3.24lbs)	0.25Kg (0.55lbs)



LT 5-3

Physical Specifications

Voltage	Capacity (AH)	Dimensions(±2)			Weight (Approx)	
		Length	Width	Height	With Acid	Electrolyte
12V	5AH	120mm (4.72 inches)	60mm (2.36 inches)	130mm (5.12 inches)	2.08Kg (4.58lbs)	0.38Kg (0.84lbs)



LT 7-3

Physical Specifications

Voltage	Capacity (AH)	Dimensions(±2)			Weight (Approx)	
		Length	Width	Height	With Acid	Electrolyte
12V	7AH	146mm (5.75 inches)	60mm (2.36 inches)	130mm (5.12 inches)	2.39Kg (5.26lbs)	0.25Kg (1.10lbs)



LT 9-3

Physical Specifications


Voltage	Capacity (AH)	Dimensions(±2)			Weight (Approx)	
		Length	Width	Height	With Acid	Electrolyte
12V	9AH	133mm (5.31 inches)	75mm (2.95 inches)	139mm (5.47 inches)	3.1Kg (6.83lbs)	0.67Kg (1.47lbs)

Key Specifications

- Intelligent Capacity Detection i-Gel Maintenance free Battery.
- Safe to use, leak proof and Multi Angle fitment.
- Massive Vibration and Impact Resistance.
- Maximum Performance in Minimum Space.
- Higher Cranking power that ensures instant Start every time.
- all-weather enduring performance & temperature resistance.
- Longer Warranty.
- Very Slow Self Discharge and extend life Cycles.

48 MONTHS WARRANTY

- 20% More cranking than conventional Battery.
- Nano Gel Technology for Ultra Long Life.

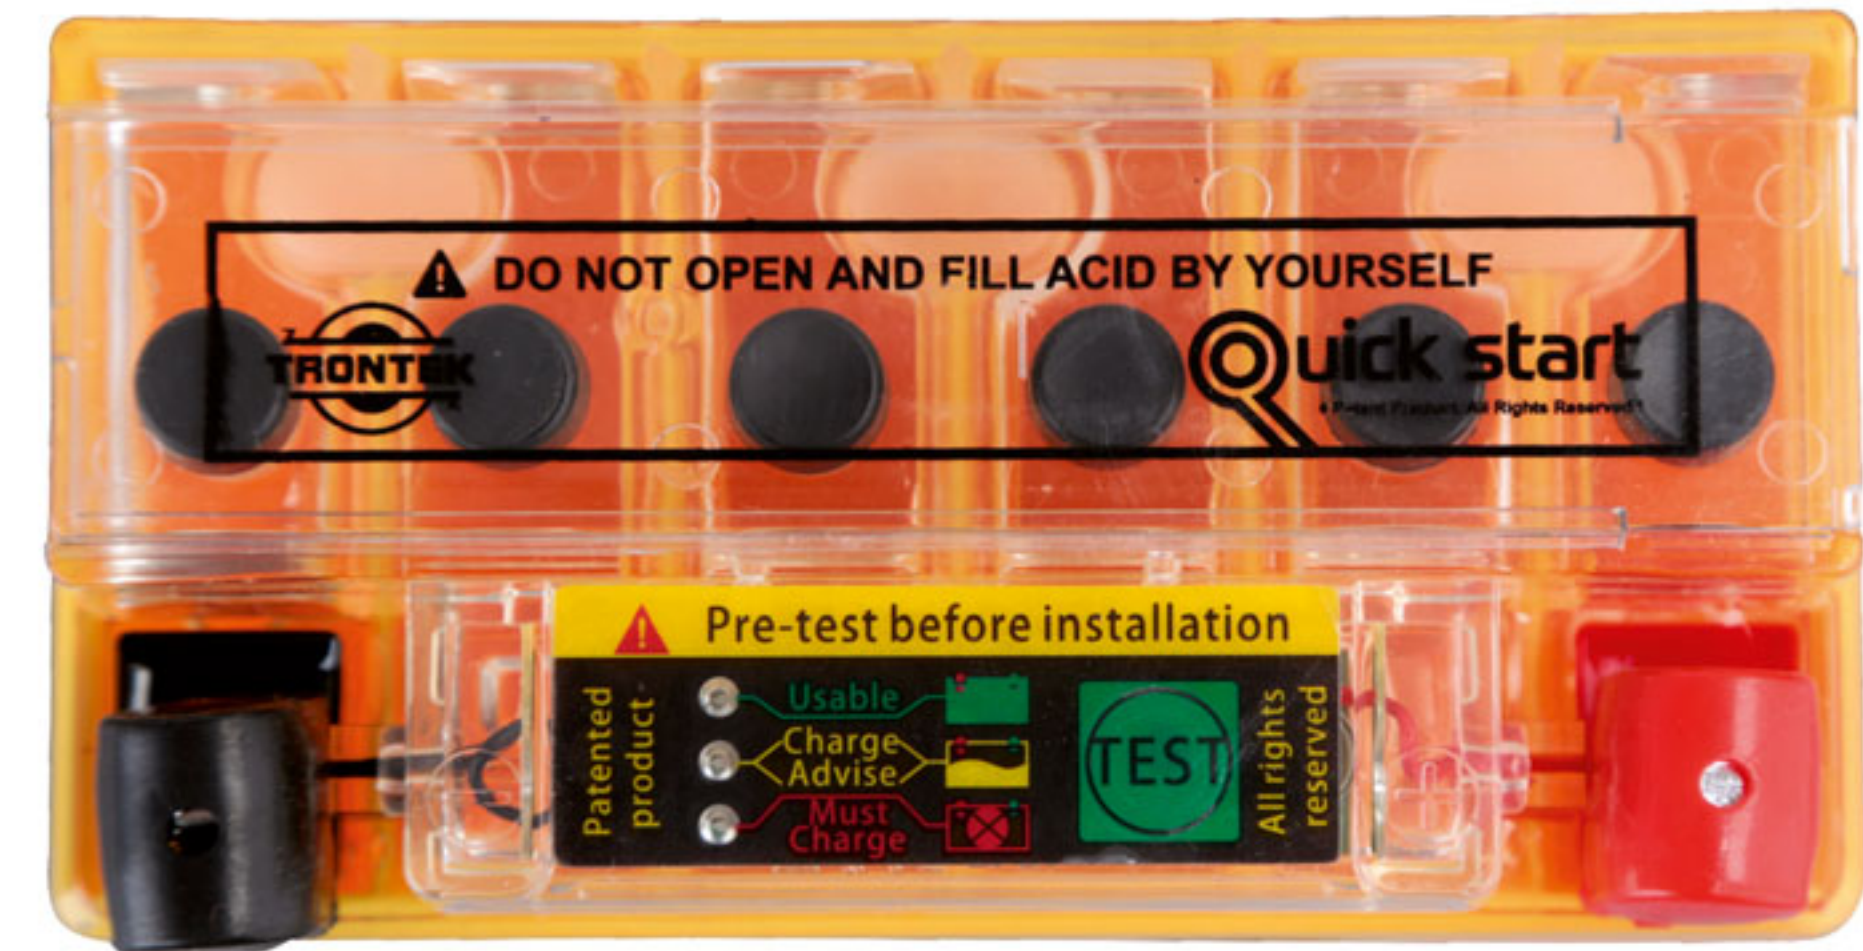

Special Feature

With high performance micro-electronic chip, It could directly check the status of the battery. Ensure the battery enough capacity and prolong the service lifespan.

Testing Indications

- Green light : Full capacity
- Yellow light : Advice charging this battery for 3-6 hours
- Red light : Charge the battery for 10 hours immediately

